


# CA67 Insulated Series Insulated Economy Proof/Hold Cabinet

Our most economical insulated unit accommodating sheet pans




- All aluminum construction with magnetic latch handle door
- 3/4" concealed foam insulation provides additional energy efficiency and enhanced heat and moisture control
- Extruded interlocking aluminum side panels extend 9/16" and will support full (18" x 26") and half size (18" x 13") sheet pans (lip hung)
- Includes dual purpose HHP-SB-EXT-6 to use for proofing or holding
- Pan stop to provides uniform heat distribution throughout
- Full height accommodates up to (33) 18" wide pans on 1-1/2" center spacing
- Ambient air temperature may affect heating performance
- Small Plate Series Casters - 5" POLU swivel, 2 w/brakes

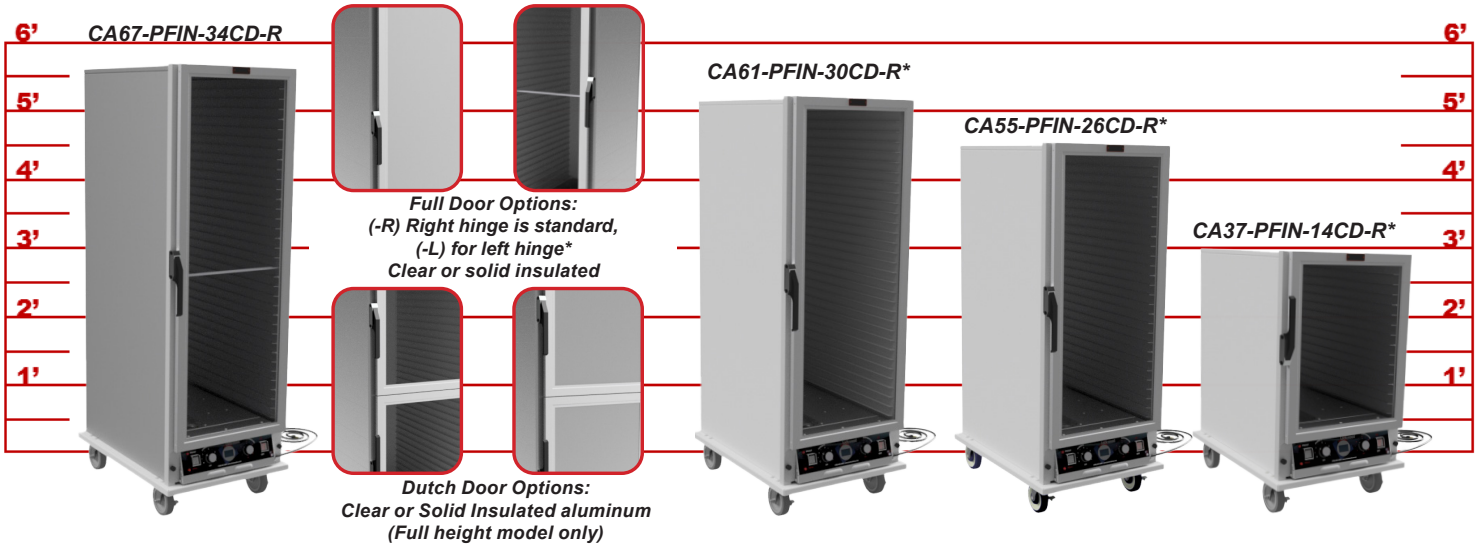


Interlocking  
Extruded  
Side Panels

## Bottom mount removable heat unit for easy maintenance and repair includes external cabinet controls



Digital thermometer in face of heat unit Temp adjustable to approximately 185°F in Hold for insulated cabinets



PROOF Hold provides dry heat only while Proof provides lower temps with humidity



Separate temperature and humidity controls

- 120 volt, 1700 watt, 60 cycle, single phase
- 8-foot cord with NEMA 5-20P plug
- Dedicated 20 amp circuit required



MODEL #	DOOR TYPE	CENTER SPACING	OUTSIDE DIMENSIONS H x W x D (INCHES)	SHEET PAN CAPACITY	WEIGHT (LBS.)
CA67-PFIN-34CD-R	CLEAR DOOR	1-1/2"	67-3/4 x 22-3/8 x 32-3/8	Up to 33	151
CA67-PFIN-34CDD-R	CLEAR DUTCH DOOR	1-1/2"	67-3/4 x 22-3/8 x 32-3/8	Up to 33	155
CA67-PFIN-34ID-R	SOLID INSULATED DOOR	1-1/2"	67-3/4 x 22-3/8 x 32-3/8	Up to 33	154
CA67-PFIN-34IDD-R	SOLID INS. DUTCH DOOR	1-1/2"	67-3/4 x 22-3/8 x 32-3/8	Up to 33	162
CA61-PFIN-30CD-R*	CLEAR DOOR	1-1/2"	61-7/8 x 22-3/8 x 32-3/8	Up to 29	155
CA61-PFIN-30ID-R*	SOLID INSULATED DOOR	1-1/2"	61-7/8 x 22-3/8 x 32-3/8	Up to 29	150
CA55-PFIN-26CD-R*	CLEAR DOOR	1-1/2"	55-3/4 x 22-3/8 x 32-3/8	Up to 25	140
CA55-PFIN-26ID-R*	SOLID INSULATED DOOR	1-1/2"	55-3/4 x 22-3/8 x 32-3/8	Up to 25	139
CA37-PFIN-14CD-R*	CLEAR DOOR	1-1/2"	37-3/4 x 22-3/8 x 32-3/8	Up to 13	125
CA37-PFIN-14ID-R*	SOLID DOOR	1-1/2"	37-3/4 x 22-3/8 x 32-3/8	Up to 13	124

- Options
- Bumpers
  - Drip pan
  - Push handle
  - Hasp lock



Intertek



Intertek

(-R) Right hinge is standard, indicate -L for left hinge. \*Left hinge and/or cabinets less than full height are non-returnable.

Proudly Manufactured in Michigan

www.lockwoodusa.com • customerservice@lockwoodusa.com



Material and Food Handling Equipment