

Job: _____
Item No: _____

PIZZA RACKS

RA70, RR69, RA65 Series

Features:

RA70 Series

- All aluminum construction
- 1" x 3" extruded pan supports riveted to uprights
- Available in 2 1/2", or 3" center spacing
- Ships knocked down

Features:

RR69 Series

- All aluminum construction
- 1" x 3" extruded removable pan supports adjustable on 1 1/2" center spacing
- Ships knocked down

Features:


RA65 Series

- All aluminum frame
- Chromed steel wire pan supports
- Holds 14" and 15" round pans
- Ships knocked down

Options:

All Rack Series

- Vinyl rack covers
- Corner Bumpers
- Pan Stop (not RA65)
- Wheel brakes
- Caster options

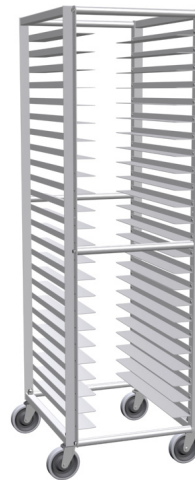


RA70-ER24-3 shown




RR69-20-3 shown




RA65-RR42-PR shown




Fall Through Detail (RA70)



Fall Through Detail (RR69)



Fall Through Detail (RA65)



Lockwood Model No.	Angles	Center Spacing	Pan			Exterior Dimensions				Weight
			Capacity	Size		Width	Depth	Height		
RA70-ER24-3	48	2 1/2"	24	various	IN	21 11/16	26 1/2	69 3/4	LBS	60
					CM	55.09	67.31	177.17	KG	27.22
RA70-ER20-3	40	3"	20	various	IN	21 11/16	26 1/2	69 3/4	LBS	54
					CM	55.09	67.31	177.17	KG	24.49
RR69-20-3	40	3"	20	various	IN	21	26 3/4	68 3/4	LBS	58
					CM	53.34	67.95	174.63	KG	26.31
RA65-RR23-KD	wire frame	2 3/8"	23	14" & 15" round	IN	19	20	62 1/2	LBS	40
					CM	48.26	48.26	158.75	KG	18.14
RA65-RR42-PR	wire frame	2 5/8"	42	14" & 15" round	IN	19	32	65 7/16	LBS	52
					CM	48.26	81.28	166.22	KG	23.59

Rack Specifications: - RA70 Series

- Uprights: 1/8" X 1 1/2" X 1 1/2" aluminum angle
- Spacer Bars: .083 x 1 1/8" round aluminum tube with steel thread insert
- Casters: (4) 5" x 1 1/8" High Tech gray non-marking threaded stem casters; load capacity 135 lbs each (61.23 kg); temp. range -45 ° / +180° F

Pan Support Specifications:

- 1" x 3" x .080" Extruded aluminum
- Riveted to uprights

Rack Specifications: - RR69 Series

- Uprights: Aluminum Extrusion
- Spacer Bars: .083 x 1 1/8" round aluminum tube with steel thread insert
- Casters: (4) 5" x 1 1/8" High Tech gray non-marking threaded stem casters; load capacity 135 lbs each (61.23 kg); temp. range -45 ° / +180° F

Pan Support Specifications:

- 1" x 3" x .080" Extruded aluminum
- Removable and adjustable on 1 1/2" centers

Rack Specifications: - RA65 Series

- Side Panels: 1/8" x 1 1/4" x 1 1/4" aluminum angle
- Spacer Bars: .083 x 1 1/8" round aluminum tube with steel thread insert
- Casters: (4) 5" x 1 1/8" High Tech gray non-marking threaded stem casters; load capacity 135 lbs each (61.23 kg); temp. range -45 ° / +180° F

Pan Support Specifications:

- Chromed steel wire
- Bolted to uprights

Lockwood reserves the right to change materials and specifications without notice.